


1. THIS IS A ULTRA- HIGH VACUUM COMPONENT (UHV)
2. WHEN MACHINING VACUUM PARTS, USE OF SILICONE AND SULPHUR-BASED CUTTING FLUIDS IS PROHIBITED. USE ONE OF THE FOLLOWING:

3. FINISHING: WHEN MACHINING VACUUM PARTS USE OF ABRASIVE PAPER OR SANDING DISCS, BUFFING OR POLISHING COMPOUNDS, OR RESIN-BONDED GRINDING WHEELS IS PROHIBITED

5. HANDLING: THE COMPONENTS SHALL BE HANDLED WITH WHITE SILK GLOVES AND WRAPPED WITH ALUMINUM FOIL TYPE DRY ANNEAL AND UNDER CLEAN ROOM CONDITIONS

7. DIMENSIONS IN ( ) ARE FOR REF. ONLY

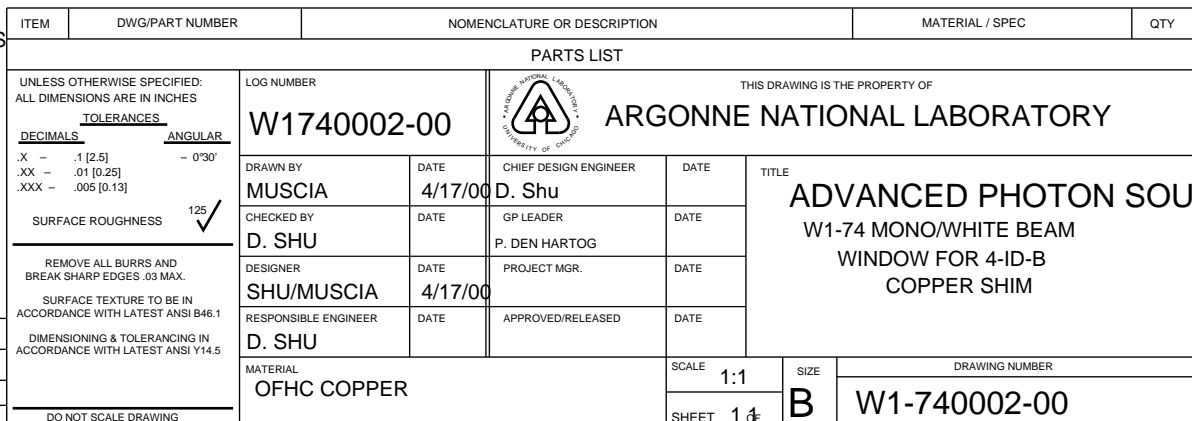

SYM	CHANGE DESCRIPTION	BY	CHKD	DATE
REVISIONS				